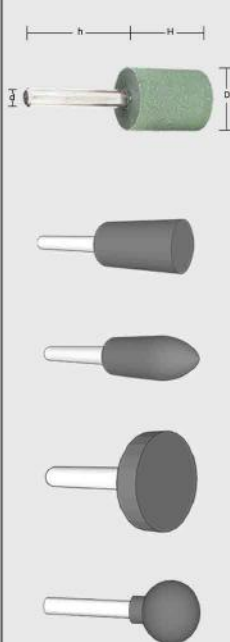


SIZE CHART:

| Rubber mounted head | | | | | | | | | |
|---------------------|-------------------|-----------------|----------------------|---|----------------------|--------------|----------------------|--|---------------------|
| Model | D(mm) Diameter | H(mm) Height | d(mm) Shank diameter | | h/mm Shank Length | Grit Size(#) | Package (pcs/bag) | Speed of revolution (rpm) | Graph 3D drawing |
| | | | 3 | 6 | | | | | |
| X03103 | 3 | 10 | ▪ | | 30 | 60-1500 | 100 |  | |
| X04133 | 4 | 13 | ▪ | | 30 | | | | |
| X05153 | 5 | 15 | ▪ | | 30 | | | | |
| X06173 | 6 | 17 | ▪ | | 30 | | | | |
| X08203 | 8 | 20 | ▪ | | 30 | | | | |
| X10203 | 10 | 20 | ▪ | | 30 | | | | |
| X10206 | 10 | 20 | | ▪ | 35 | | | | |
| X10256 | 10 | 25 | | ▪ | 35 | | | | |
| X12203 | 12 | 20 | ▪ | | 30 | | | | |
| X12206 | 12 | 20 | | ▪ | 35 | | | | |
| X12256 | 12 | 25 | | ▪ | 35 | | | | |
| X16256 | 16 | 25 | | ▪ | 35 | | | | |
| X20033 | 20 | 3 | ▪ | | 30 | | | | |
| X20043 | 20 | 4 | ▪ | | 30 | | | | |
| X20053 | 20 | 5 | ▪ | | 30 | | | | |
| X20256 | 20 | 25 | | ▪ | 35 | | | | |
| X25033 | 25 | 3 | ▪ | | 30 | | | | |
| X25043 | 25 | 4 | ▪ | | 30 | | | | |
| X25053 | 25 | 5 | ▪ | | 30 | | | | |
| X25256 | 25 | 25 | | ▪ | 35 | | | | |
| X30066 | 30 | 6 | | ▪ | 35 | | | | |
| X30086 | 30 | 8 | | ▪ | 35 | | | | |
| X30106 | 30 | 10 | | ▪ | 35 | | | | |
| X30256 | 30 | 25 | | ▪ | 35 | | | | |
| X40066 | 40 | 6 | | ▪ | 35 | | | | |
| X40086 | 40 | 8 | | ▪ | 35 | | | | |
| X40106 | 40 | 10 | | ▪ | 35 | | | | |

Other dimensions custom please visit www.kytools.cn or send to beibei.liu@kytools.cn

DETAILED DESCRIPTION:

- ▶ **Raw material:** Alumina
- ▶ **Particle size:** 60#、80#、120#、180#、240#、320#、400#、600#、800#、1500#
- ▶ **Shape:** Cylindrical, T-shaped, conical, spherical
- ▶ **Shank diameter:** 3mm、6mm、3.175mm、6.35mm
- ▶ **Handle length:** 30mm、35mm (other sizes can be customized)
- ▶ **Hardness of grinding head:**

High elastic grinding head, adjustable hardness (customizable) This product has a variety of specifications and granularity, accept non-standard size customization, range including height, aperture, material, handle length, etc. The most prominent features of this series of products are soft polishing and fine polishing. Can cooperate with various high speed electric tools or pneumatic tools. It is mainly used



for edge honing of carbide tools to remove fine burr from various materials. And widely used to remove resin mold burn marks, scales, rust, scratches, dents and chuck marks cleaning treatment; Also suitable for removing paint, electroplating and coating, by adjusting the high elasticity of rubber material, thus preventing machining scratches.

PARTICLE SIZE GUIDE:

| Particle size | 60 | 80 | 120 | 180 | 240 | 320 | 400 | 600 | 800 | 1500 |
|---------------|---|--|--|---|---|---|--|--|---|---|
| color |  Purple |  red |  green |  bean sauce |  blue |  gray |  brown |  light |  yellow |  cyan |



GRANULE RUBBER MOUNTED HEAD

General information



SIZE CHART:

| Granule rubber mounted head | | | | | | | | | |
|-----------------------------|-------------------|-----------------|----------------------|---|----------------------|------------------|----------------------|---------------------------------|---------------------|
| Model | D(mm) Diameter | H(mm) Height | d(mm) Shank diameter | | h/mm Shank Length | Grit Size(#) | Package (pcs/bag) | Speed of revolution (rpm) | Graph 3D drawing |
| | | | 3 | 6 | | | | | |
| Z03103 | 3 | 10 | ▪ | | 30 | 80 120 180 | 100 | 25000 | |
| Z04133 | 4 | 13 | ▪ | | 30 | | | | |
| Z05153 | 5 | 15 | ▪ | | 30 | | | | |
| Z06173 | 6 | 17 | ▪ | | 30 | | | | |
| Z08203 | 8 | 20 | ▪ | | 30 | | | | |
| Z10203 | 10 | 20 | ▪ | | 30 | | | | |
| Z10206 | 10 | 20 | | ▪ | 35 | | | | |
| Z10256 | 10 | 25 | | ▪ | 35 | | | | |
| Z12203 | 12 | 20 | ▪ | | 30 | | | | |
| Z12206 | 12 | 20 | | ▪ | 35 | | | | |
| Z12256 | 12 | 25 | | ▪ | 35 | | | | |
| Z16256 | 16 | 25 | | ▪ | 35 | | | | |
| Z20033 | 20 | 3 | ▪ | | 30 | | | | |
| Z20043 | 20 | 4 | ▪ | | 30 | | | | |
| Z20053 | 20 | 5 | ▪ | | 30 | | | | |
| Z20256 | 20 | 25 | | ▪ | 35 | | | | |
| Z25033 | 25 | 3 | ▪ | | 30 | | | | |
| Z25043 | 25 | 4 | ▪ | | 30 | | | | |
| Z25053 | 25 | 5 | ▪ | | 30 | | | | |
| Z25256 | 25 | 25 | | ▪ | 35 | | | | |
| Z30066 | 30 | 6 | | ▪ | 35 | | | | |
| Z30086 | 30 | 8 | | ▪ | 35 | | | | |
| Z30106 | 30 | 10 | | ▪ | 35 | | | | |
| Z30256 | 30 | 25 | | ▪ | 35 | | | | |
| Z40066 | 40 | 6 | | ▪ | 35 | | | | |
| Z40086 | 40 | 8 | | ▪ | 35 | | | | |
| Z40106 | 40 | 10 | | ▪ | 35 | | | | |

Other dimensions custom please visit www.kytools.cn or send to beibei.liu@kytools.cn

DETAILED DESCRIPTION:

- ▶ **Raw material:** Alumina oxide
- ▶ **Particle size:** 80#、120#、180#
- ▶ **Shape:** Cylindrical, T - shaped, conical, spherical
- ▶ **Shank diameter:** 3mm、6mm、3.175mm、6.35mm
- ▶ **Handle length:**30mm、35mm (other sizes can be customized)
- ▶ **Hardness of grinding head:**

high elastic grinding head, adjustable hardness (customizable). This product has a variety of specifications and granularity, accept non-standard size customization, range including height, aperture, material, handle length, etc. This series of products are composed of special abrasive particles and original rubber, which is also a three-in-one polishing head for grinding, polishing and cleaning, with



the rubber wheel, the elasticity is smaller, the density is higher, the hardness is higher, more suitable for the rough, dirty metal, aluminum alloy and other surfaces for derusting, removing barbs, and welding interface and other uneven surface of the initial polishing. Efficient grinding not only burnishes a rough surface, it also does not burn parts or cause discoloration.

PARTICLE SIZE GUIDE:

| Particle size | 80 | 120 | 180 |
|---------------|---------|-----------|-------------------|
| color | red | green | earthy yellow |



ELASTIC GRANULEE RUBBER MOUNTED



General information

CHARACTERISTICS:

This product has a variety of specifications and grits, accept non-standard size customization, including height, aperture, material, handle length, etc. This series of products is composed of special abrasive particles and original rubber, and it is also a polishing head that will polish, polish and clean in one. Compared with the rubber wheel, the elasticity is smaller, the density is higher, the hardness is higher, more suitable for the rough, dirty metal, aluminum alloy and other surfaces for derusting, removing barbs, and welding interface and other uneven surface of the initial polishing. Efficient grinding not only burnishes a rough surface, it also does not burn parts or cause discoloration.



- ▶ Rubber elasticity ensures smooth polishing marks, thus addressing surface roughness and preventing deep polishing lines from occurring.
- ▶ The unique elasticity (softness) of rubber sesame prevents machining marks caused by grinding between the work piece during use to provide a fine polished surface.
- ▶ Adapt to the surface, eliminate the impact of the work-piece
- ▶ Instability. Not only can be aligned with the workpiece correctly, to achieve a stable polishing surface, but also with less work to polish. Continuous polishing, small dust index, so as to improve the operating environment, ensure safe operation.
- ▶ Fine polishing, reduce the polishing process, get the best polishing effect.

PARTICLE SIZE GUIDE:

